


EVOLVEO® FlyMotion D1

V4-25/11

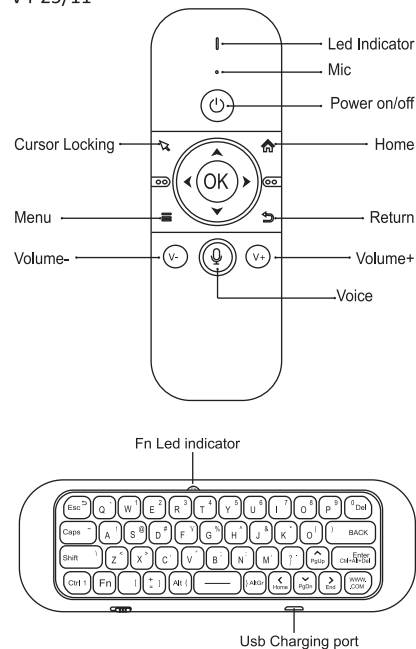

Keyboard Use: Press Fn while the Fn indicator light is on, at this time Switch to the blue character function, press Fn again, the Fn indicator goes off, switch to the white character function, press www..com, and quickly enter www..com characters.
Features: Six-axis anti-screw flying mouse, standard keyboard layout, infrared learning function, voice function, operating distance up to 10 meters, built-in rechargeable lithium battery, ultra-low power consumption design.

Applications:

This is an intelligent flying mouse keyboard remote controller with built-in 6-axis anti-screw instrument, remote controller, voice input and keyboard. It can be used in computer intelligent TV, Android TV box, network player, HTPC, etc. to realize intelligent and convenient operations such as traditional remote control, mouse and motion sensing games, language input, keyboard input, etc.

How to use:

Take out the USB receiver, insert it into the USB interface, use it for the first time, wait for 20-60 seconds, the system will automatically install the USB receiver driver, wave the keyboard, the cursor will move on the screen, the flying mouse keyboard can be used.

Infrared learning

1. Putting the remote control into learning mode Press and hold the on/off button on the EVOLVEO FlyMotion remote control for 5 seconds. The blue light will start to flash slowly - the remote control is now in learning mode.
2. Copying the IR signal Point the second remote control (for example, from a TV) directly at the EVOLVEO FlyMotion remote control so that their infrared diodes are facing each other and the distance between them is no more than 1 cm. Press the off button on the TV remote control. The blue light on the FlyMotion remote control will flash quickly several times, indicating that learning has been successfully completed.

3. Restoring default settings To reset to factory settings, press and hold the OK button and the on/off button at the same time.

How to Adjust Cursor Rate

1. Press OK (V) to add-cursor speed is slow.
2. Press OK (V) cursor to speed up.

USB pairing mode

Press and hold the OK button and the Back button at the same time for about 3 seconds. The blue light will start to flash quickly. Then insert the USB receiver into the device. When the blue light stops flashing, the remote control is successfully connected.

Turn-over prohibition function

In order to prevent misoperation of keys, flying mice are only allowed to go up during normal use, and the function of one key is prohibited from being output for the function of the next key.

Sleep and wake up

When the flying mouse does not operate for 15 seconds, the flying mouse enters sleep mode.

After the flying mouse goes to sleep, press any key to wake up the flying mouse, and the flying mouse enters the working state.

Low power prompt:

When the flying mouse is short of electricity in use, the LED light flashes slowly to remind.
At this time, flying mice need to be charged. When charging, the LED red light is always on. When the LED red light goes out, the flying mouse is fully charged.

Function grid key:

- 2.4G on key and infrared on key
- Cursor switch
- Main interface
- Menu
- Return to the previous screen
- Volume reduction
- Volume up
- Voice key

Specification parameter

Wireless modulation mode: GFSK
Operating temperature: -20℃~65℃
Modulation frequency: 2.4~2.4835GHz
Battery type: 400mAh/3.7V lithium battery
Overall power consumption: 9mA
Standby power consumption: 25uA
Number of keys pressed: 58
Remote control distance: > 10m
Charging port: USB-C
Overall dimensions: 165×55.5×16.5MM
Net weight of product: 86.5±5g
Support System: Android\Windows\Mac OS\Linux

pay attention to

This product uses a built-in lithium battery with a charging input voltage of 5V. If the remote controller has not been used for a long time or has insufficient power, please fully charge it before using it.
Charging the remote controller with the designated USB cable will shorten the battery life. Avoid using in extremely hot or cold environment, which will shorten the battery life. Please use this product away from liquids, such as water.

The package contains

1. Remote control
- 2.USB Charger
- 3.USB receiver
4. Instruction



Disposal: The symbol of crossed out container on the product, in the literature or on the wrapping means that in the European Union all the electric and electronic products, batteries and accumulators must be placed into the separate salvage after finishing their lifetime. Do not throw these products into the unsorted municipal waste



DECLARATION OF CONFORMITY
Hereby, the company Abacus Electric, s.r.o. declares that the EVOLVEO FlyMotion D1 is in compliance with the requirements of the standards and regulations, relevant for the given type of device.

Find the complete text of Declaration of Conformity at <http://ftp.evolveo.com/ce/>.

Importer / Manufacturer
Abacus Electric, s.r.o.
Planá 2, 370 01, Czech Republic
Email: helpdesk@evolveo.com

Made in P.R.C.

Copyright © Abacus Electric, s.r.o.
www.evolveo.com
www.facebook.com/EvolveoCZ

All rights reserved.
Design and specification may be changed without prior notice.

